



Building Contractors Ltd


CASE STUDY 00024 - 22 Wild's Rents, Bermondsey, London

Roof-Light Refurbishment

CASE STUDY

MAPA01/0001

- ▶ **Date of Project:**
25 June 2023
- ▶ **Project Location:**
Bermondsey, London
- ▶ **Project Type:**
Roof-light Refurbishment
- ▶ **Contract Type:**
Sub-Contractor
- ▶ **Contract Value:**
£1,600.00

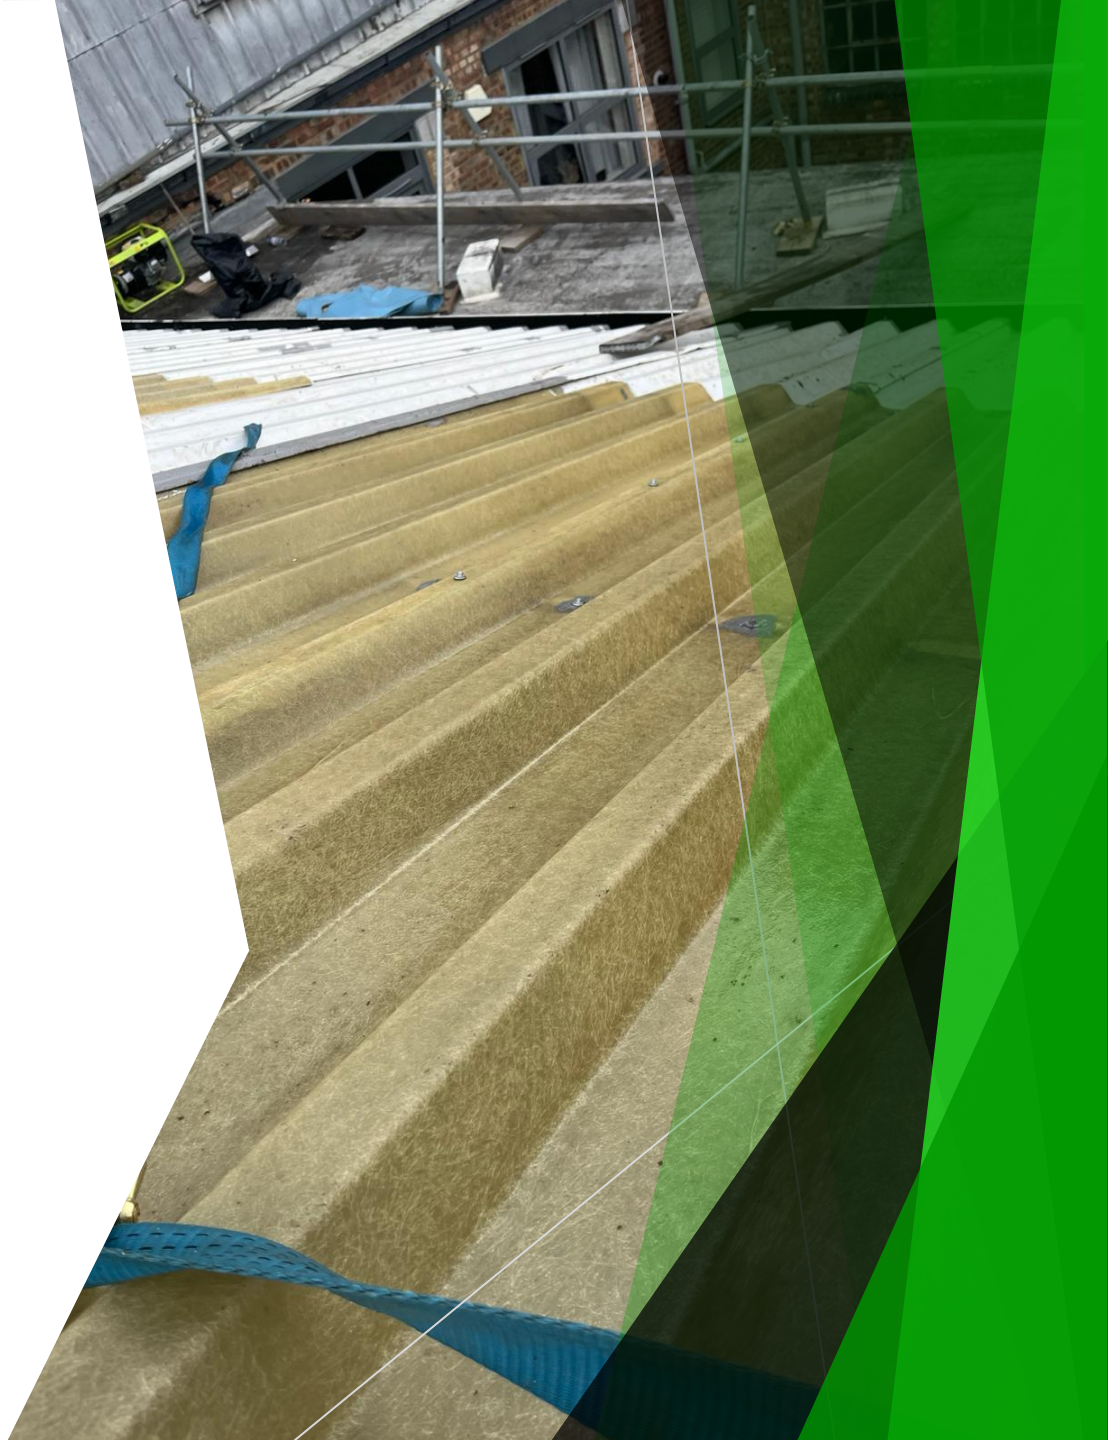


Bermondsey, London

Roof-Light Refurbishment

Tritec Building contractors were awarded with the following works:

- **Roof-Light Refurbishment** - Operatives started by gently cleaning all rooflight surfaces to make free of any mould or fungus growth. Once cleaned, the roof-lights needed to be dried before application of any product. On completion of the preparation steps, Operatives brush/roller applied one coat of DriSilane ReGlaze in an even application to ensure full substrate coverage.

Tritec Building Contractors are experienced refurbishment contractors that provide efficient services to extend the lifespan of commercial building fabrics & their components.

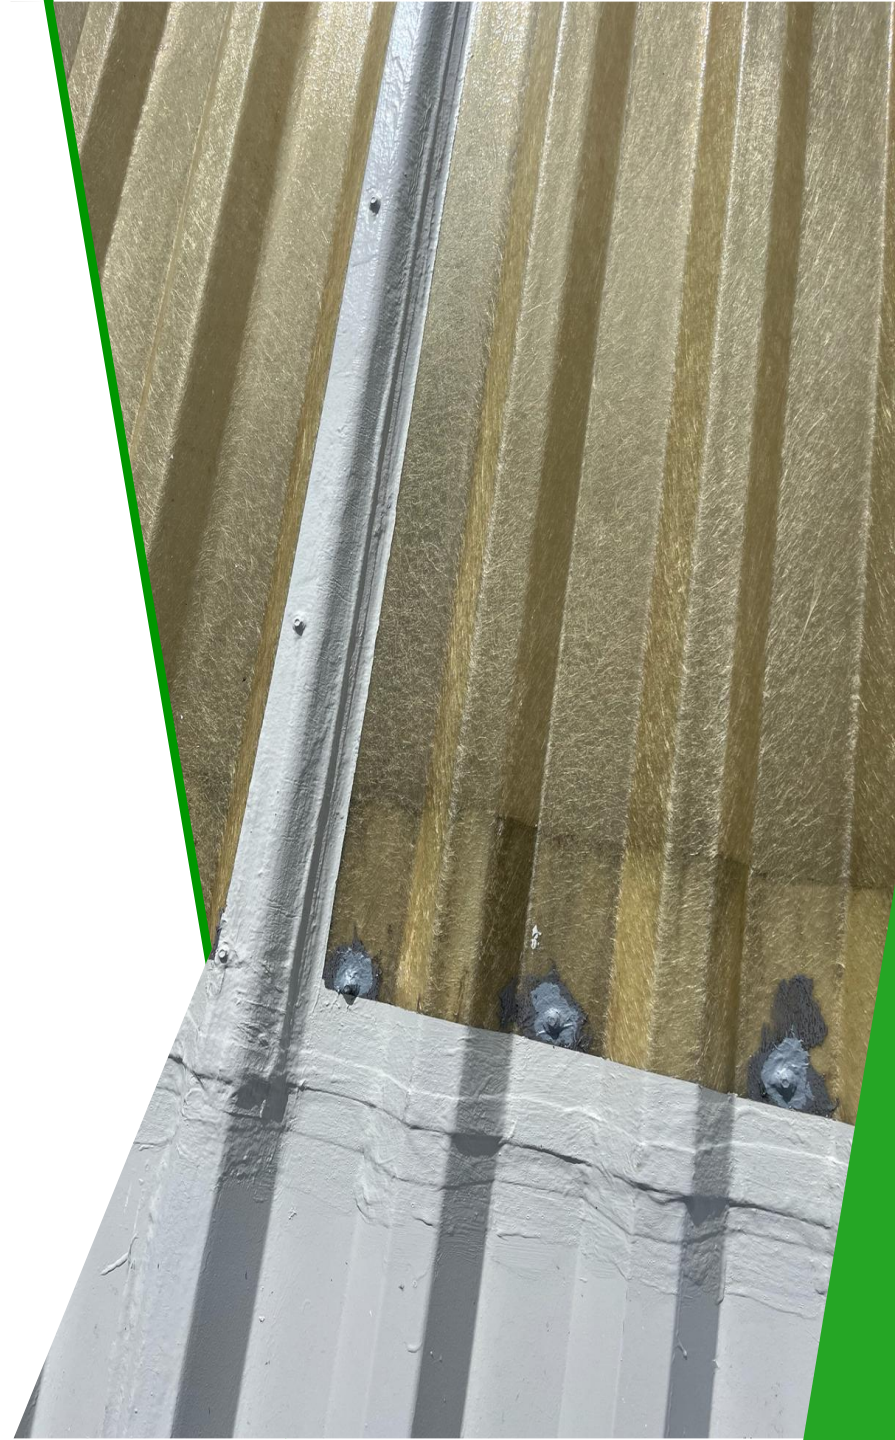

Roof-Light Refurbishment - DriSilane ReGlaze

The existing Roof-Light panels were suffering from UV and weather degradation. GRP can lose its protective gel coat and polycarbonate can micro crack. The existing rooflights on this project were structurally salvageable and could be retained. With the application of DriSilane® ReGlaze Tritec were able to extend the life of the rooflight for another 15 years.



Before

The existing GRP roof lights had started to mould due to UV exposure and general weathering; they had become fibrous and reduced light transmission into the warehouse area below.





After

The Existing rooflights needed to be structurally sound and free from dirt, mould, loose and flaking coatings, moss and algae, oil, grease, ice & frost. All visible sealants, mastics and bituminous coatings needed to be removed. The Rooflights needed to be cleaned with care, avoiding any possible damage during the cleaning process.

On completion of the preparation steps, Operatives brush/roller applied one coat of DriSilane ReGlaze in an even application to ensure full substrate coverage.

BEFORE



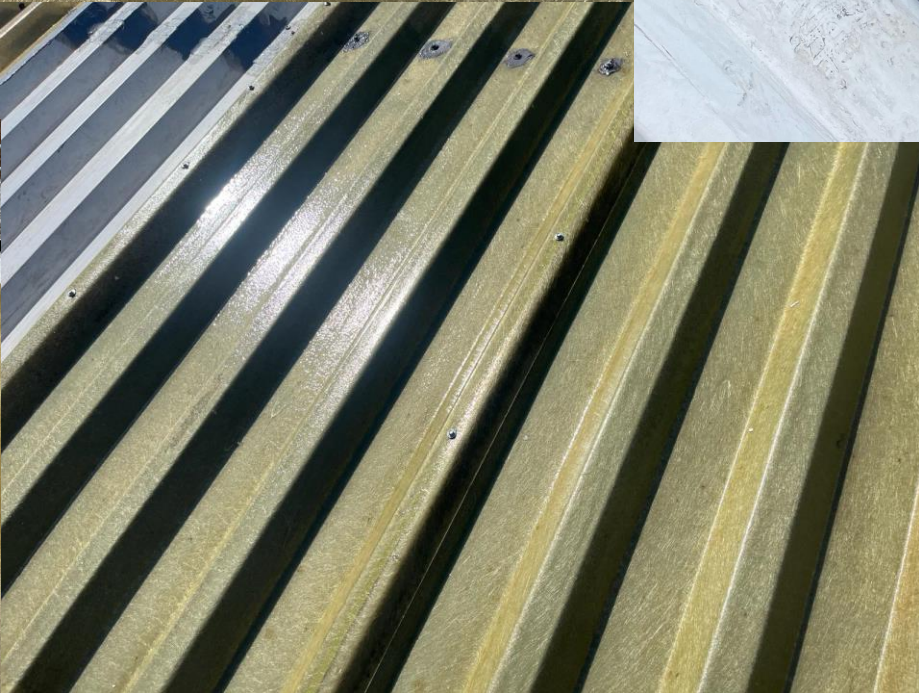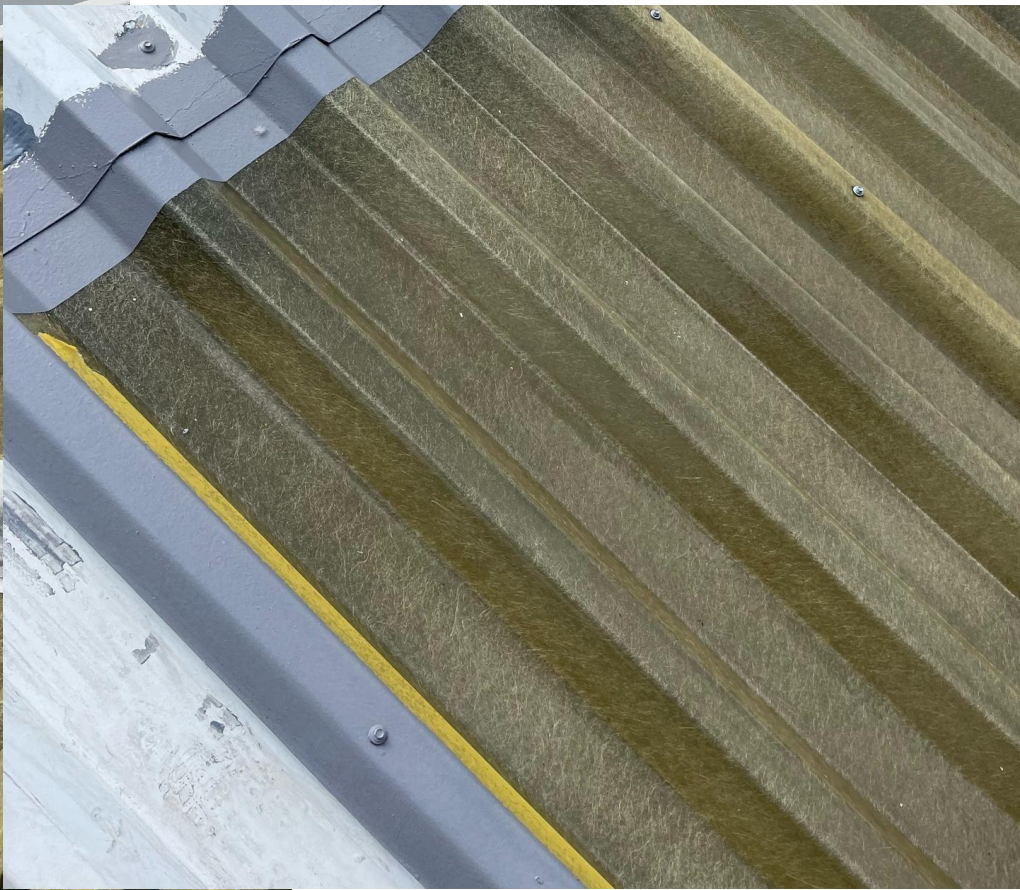

After

Tritec Building Contractors Ltd
Unit 26 Charfleets Farm Way,
Charfleets Industrial Estate
Canvey Island
Essex
SS8 0PG

01268 698 299
info@tritec-ltd.com
www.tritecbuildingcontractors.co.uk



Building Contractors Ltd

APPROVED CONTRACTORS FOR:
GIROMAX - HD SHARMANS - LIQUASIL - WESTWOOD LIQUIDS - BROMOCO - TOR COATINGS - WEATHERFOLD

